

For the toughest jobs, you need the toughest trailers. Redrock's Dump Trailers feature an innovative fold down door configuration, to make tipping easier and safer. 14 & 16 ton trailers come with 8mm floor and 6mm sides and 18 - 25 ton trailers come with 10mm floors and 8mm sides. Hardox steel option is available on request.




Redrock Dump Trailer bodies are constructed with vertical supports integrated into the chassis to give the maximum possible support and strength for heavy loads. All Dump Trailers have a sprung drawbar for increased driver comfort and to reduce stress on the tractor hitch.







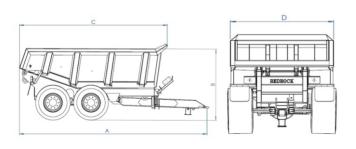

Standard Features

- On 385/65 x 22.5 wheels
- Sprung Drawbar
- Hydraulic Tail Door
- 10 stud Sprung Axle
- Hydraulic Brakes

Α	В	С	D	Capacity
5790mm	2100mm	4560mm	2240mm	7.25m³
5790mm	2200mm	4560mm	2240mm	8.25m³
5790mm	2325mm	4560mm	2240mm	9.25m³
6240mm	2335mm	5010mm	2240mm	10.25m³
		5470mm	2455mm*	12.75m³
	5790mm 5790mm 5790mm 6240mm 7570mm	5790mm 2100mm 5790mm 2200mm 5790mm 2325mm 6240mm 2335mm	5790mm 2100mm 4560mm 5790mm 2200mm 4560mm 5790mm 2325mm 4560mm 6240mm 2335mm 5010mm 7570mm 2530mm 5470mm	5790mm 2100mm 4560mm 2240mm 5790mm 2200mm 4560mm 2240mm 5790mm 2325mm 4560mm 2240mm 6240mm 2335mm 5010mm 2240mm 7570mm 2530mm 5470mm 2455mm*

Trailer Options

- Wider wheels
- Air/Hydraulic brakes
- Commercial Axles
- Swivel Hitch eye
- Load sensing valve
- Hardox Steel Body

Designed to perform, Built to last.

Due to our policy of continuous improvement Redrock reserve the right to alter the specification displayed on this brochure. ML171022

www.redrockmachinery.com